

Current Transducer/Sensor



BJ19 AC Current Transducer

FEATURES

- ***Working principle:** New electromagnetic isolation
- ***Usage:** Used to measure AC current, especially for power frequency 50 Hz sine wave AC current
- ***Advantage:** The best performance/price ratio, power loss and small volume, light weight, easy installation, perforated input, without the insertion loss.
- ***Application:** Widely used for measuring AC current
- ***Dimension (mm):** BJ19:80(L)×12(W)×80(H), Apertures: 32mm


MODEL

LF- AI12-   BJ19-2 / 
A B C

Model selection1:LF- AI12-33 BJ19-2/10A

Explanation: this product is a 10A input range, 0-5V, 15V power supply, BJ19 style AC Current Transducer

DIMENSION DIAGRAM

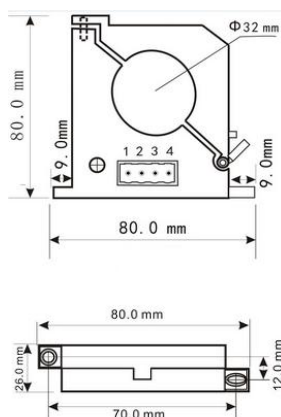


ELECTRICAL DATA

- *Input Range: 5mA~50A can choose 0.5A, 15A etc
- *Accuracy Grade: $\leq 2\%$.F.S
- *Linearity Degree: better than 0.1%
- *Response Time: $\leq 250\text{ms}$
- *Offset Voltage: $\leq 10\text{mV}$
- *Frequency Range: 20~5KHz
- *Temperature Characteristics: $\leq 100\text{PPM}/^\circ\text{C}$ (0~50 $^\circ\text{C}$)
- *Power Consumption: $\leq 5\text{mA}$
- *Load: Voltage output: 5mA, Current output:6V
- *Over Load: 30 times of input
- *Isolation Withstanding Voltage:AC3.0KV/min*1mA between input /output/ power
- *Flame Retardancy:UL94-V0
- *Working Environment:-10 $^\circ\text{C}$ ~70, 20%~90% without condensation
- *Storage Environment:-40 $^\circ\text{C}$ ~85, -20%~95% without condensation

MODEL REMARKS

A---Output	B---Power supply
1.0~10V	2:5V $\pm 10\%$
2: 0~4V	2:12V $\pm 10\%$
3: 0~5V	4:24V $\pm 15\%$
4: 0~20mA	
5: 4~20mA	
T: Special output	C---Current input range

CONNECTION DIAGRAM



Xiamen ZT Technology Co., Limited