


Current Transducer/Sensor



BJ23 AC Current Transducer

FEATURES

- ***Working principle:** New electromagnetic isolation
- ***Usage:** Used to measure AC current, especially for power frequency 50 Hz sine wave AC current
- ***Advantage:** The best performance/price ratio, power loss and small volume, light weight, easy installation, perforated input, without the insertion loss.
- ***Application:** Widely used for measuring AC current
- ***Dimension (mm):** BJ23: 99(L) × 24(W) × 65(H)


MODEL

LF- AI12-   BJ23-0.5/ 
A B C

Model selection1:LF- AI12-33 BJ23-1.0/10A

Explanation: this product is a 10A input range, 0-5V, 15V power supply, BJ23 style AC Current Transducer

DIMENSION DIAGRAM

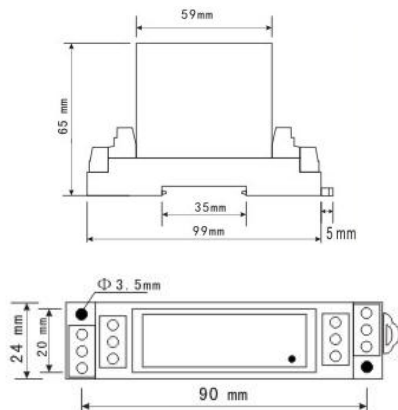


ELECTRICAL DATA

- *Input Range: 5mA~10A can choose 10mA, 15A etc
- *Accuracy Grade: $\leq 0.5\%$.F.S
- *Linearity Degree: better than 0.1%
- *Response Time: $\leq 250\text{ms}$
- *Offset Voltage: $\leq 10\text{mV}$
- *Frequency Range: 20~5KHz
- *Temperature Characteristics: $\leq 100\text{PPM}/^\circ\text{C}$ (0~50 $^\circ\text{C}$)
- *Power Consumption: $\leq 5\text{mA}$
- *Load: Voltage output: 5mA, Current output: 6V
- *Over Load: 30 times of input
- *Isolation Withstanding Voltage: AC3.0KV/min*1mA between input /output/ power
- *Flame Retardancy: UL94-V0
- *Working Environment: -10 $^\circ\text{C}$ ~70, 20%~90% without condensation
- *Storage Environment: -40 $^\circ\text{C}$ ~85, -20%~95% without condensation

MODEL REMARKS

A---Output	B---Power supply
2: 0~4V	2: 12V $\pm 10\%$
3: 0~5V	3: 15V $\pm 10\%$
4: 0~20mA	4: 24V $\pm 15\%$
5: 4~20mA	5: 220VAC/VDC
	6: 110VAC/VDC
	7: OEM
T: Special output	C---Current input range
Two Wires,	
1 input- 1output,	
1input – outputs etc	

CONNECTION DIAGRAM



Xiamen ZT Technology Co., Limited