

Current Transducer/Sensor



BJ5 AC Zero Magnetic Flux Leakage Current Sensor

FEATURES

***Working principle:** "zero flux" automatic compensation principle, the sensor has been ideal working state of "zero flux", guarantees the contrast and the difference value in the highest accuracy.


***Usage:** Specially designed for ac leakage current sampling from all kinds of power equipment insulation online monitoring system.

***Advantage:** The best performance/price ratio, high accuracy, high stability, small volume, light weight, easy installation, perforated input, without insertion loss

***Application:** suitable for 1~500KV electrical equipment grounding wire leakage current and dielectric loss of electric testing, insulation online monitoring systems, such as: PT and CT, main transformer casing, main transformer iron core, a variety of lightning arrester, switch, etc.

***Dimension(mm):** BJ5: 120(L)×34(W)×101(H) aperture: 45mm

MODEL

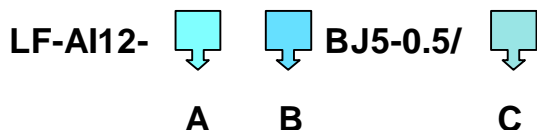


Model selection1:LF-AI12-33BJ5-1.0/0~10mA

Explanation: this product is a 0~10mA input range, 0~5v output, 15V power supply,

BJ5 style AC Zero Magnetic Fluxleakage current sensor.

DIMENSION DIAGRAM

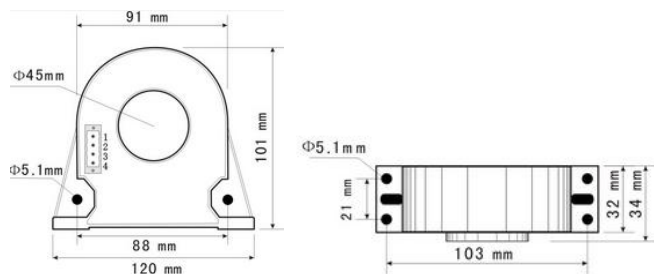

ELECTRICAL DATA

*Input Range: 5~1200mA can choose 0~5mA, 0~100mA etc

*Accuracy Grade: $\leq 0.5\%$.F.S

*Linearity Degree: better than 0.1%

*Response Time: ≤ 200 mS

*Offset Current: ≤ 20 uA

*Temperature Characteristics: ≤ 100 PPM/ $^{\circ}$ C (0~50 $^{\circ}$ C)

*Power Consumption: ≤ 10 mA

*Load: Voltage output: 5mA, Current output:6V

*Over Load: 10 times of input

*Isolation Withstanding Voltage:AC3.0KV/min*1 mA between input /output/ power

*Flame Retardancy:UL94-V0


*Working Environment:-10 $^{\circ}$ C ~70, 20%~90% without condensation

*Storage Environment:-40 $^{\circ}$ C ~85, -20%~95% without condensation

MODEL REMARKS

A---Output	B---Power supply
2: 0~4V	2:12V $\pm 10\%$
3: 0~5V	3:15V $\pm 10\%$
	4:24V $\pm 15\%$
T: Special output	C---Current input range

CONNECTION DIAGRAM

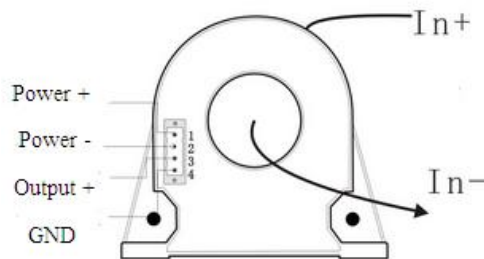

Xiamen ZT Technology Co., Limited

<http://www.transducersgroup.com>

sales@transducersgroup.com

Jason Zeng

Skype: zntarjason