


Current Transducer/Sensor






BJ29 AC Voltage Transducer

FEATURES

- ***Working principle:** New electromagnetic isolation
- ***Usage:** Used to measure AC Voltage, especially for power frequency 50 Hz sine wave AC Voltage
- ***Advantage:** The best performance/price ratio, power loss and small volume, light weight, easy installation, perforated input, without the insertion loss.
- ***Application:** Widely used for measuring AC Voltage
- ***Dimension (mm):** BJ29: 23(L) × 33(W) × 40(H)


MODEL

LF-AV12-   BJ29-0.5/ 
A B C

Model selection1:LF- AV12-32 BJ29-0.5/10mA

Explanation: this product is a 10mA input range, 0-5V output, 12V power supply, BJ29- style AC Voltage Transducer

DIMENSION DIAGRAM

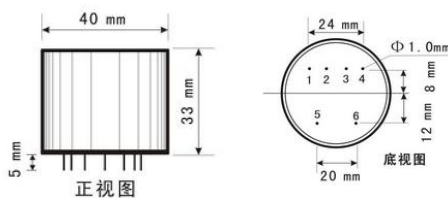


ELECTRICAL DATA

- *Input Range: 0V~600V can choose 10V, 100V etc
- *Accuracy Grade: $\leq 0.5\%$.F.S
- *Linearity Degree: better than 0.1%
- *Response Time: Photoelectric isolation < 15 us;
Modulation type < 150 ms.
- *Offset Voltage: $\leq 10\text{mV}$
- *Frequency Range: 20~5 KHz
- *Temperature Characteristics: $\leq 100\text{PPM}/^\circ\text{C}$ (0~50 $^\circ\text{C}$)
- *Power Consumption: $\leq 25\text{mA}$
- *Load: Voltage output: 5mA, Current output: 6V
- *Over Load: 2 times of input
- *Isolation Withstanding Voltage:
AC3.0KV/min*1mA between input /output/ power
- *Flame Redundancy: UL94-V0
- *Working Environment: -10 $^\circ\text{C}$ ~70,
20%~90% without condensation
- *Storage Environment: -40 $^\circ\text{C}$ ~85,
-20%~95% without condensation

MODEL REMARKS

A---Output	B---Power supply
1. 0~10V	1. 5V
3: 0~5V	2: 12V $\pm 10\%$
4: 0~20mA	4: 24V $\pm 15\%$
5: 4~20mA	
T: Special output	C---Current input range

CONNECTION DIAGRAM

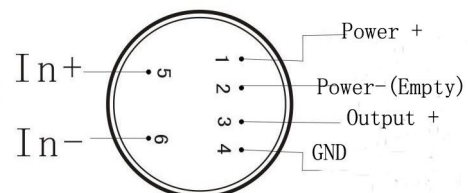

Xiamen ZT Technology Co., Limited