

Current Transducer/Sensor




BJ8 AC Leakage Current Sensor

FEATURES

- ***Working principle:** The magnetic modulation principle.
- ***Usage:** Used to measure ac leakage current and all kinds of small ac current
- ***Advantage:** The best performance/price ratio, high stability, small volume, light weight, PCB installation, and perforated input, without the insertion loss
- ***Application:** The leakage monitoring system, line detection, signal system, insulation monitoring, dc high voltage measurement.
- ***Dimension (mm):** BJ8: 80(L)×80(W)×26(H) aperture: 32mm


MODEL

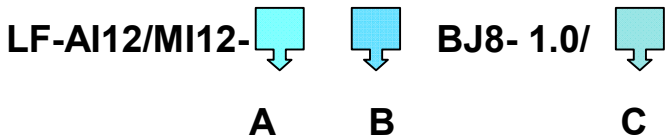

Model selection1:LF-AI12/MI12-33BJ8-1.0/0~10mA

Explanation: this product is a 0~10mA input range, 0~5v output, 15V power supply, BJ8 style AC leakage current sensor.

DIMENSION DIAGRAM

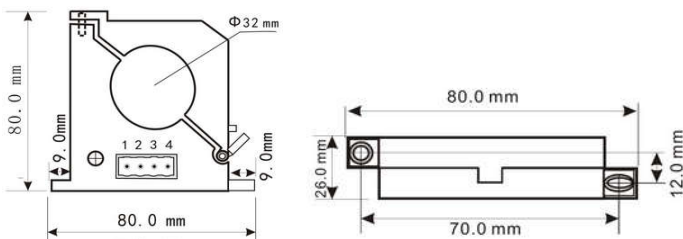

ELECTRICAL DATA

- *Input Range: 5~1200mA can choose 0~5mA, 0~100mA etc
- *Accuracy Grade: $\leq 0.5\%$.F.S
- *Linearity Degree: better than 0.2%
- *Response Time: ≤ 200 mS
- *Offset Current: ≤ 20 uA
- *Temperature Characteristics: ≤ 100 PPM/ $^{\circ}$ C(0~50 $^{\circ}$ C)
- *Power Consumption: ≤ 20 mA
- *Load: Voltage output: 5mA, Current output:6V
- *Over Load: 10 times of input
- *Isolation Withstanding Voltage:AC3.0KV/min*1mA between input /output/ power
- *Flame Retardancy:UL94-V0
- *Working Environment:-10 $^{\circ}$ C ~70, 20%~90% without condensation
- *Storage Environment:-40 $^{\circ}$ C ~85, -20%~95% without condensation

MODEL REMARKS

A---Output	B---Power supply
2: 0~4V	2:12V $\pm 10\%$
3: 0~5V	3:15V $\pm 10\%$
4: 0~20mA	4:24V $\pm 15\%$
5: 4~20mA	
T: Special output	C---Current input range

CONNECTION DIAGRAM

1. P+ Power +
2. P- Power -
3. OT+ Output +
4. GND



Xiamen ZT Technology Co., Limited

<http://www.zntarsensor.com>

sales@zntar.com

Jason Zeng

Skype: zntarjason